

# AVD21W

## 21.5" Industrial LCD monitor



### Specifications

#### Display

- LED Size: 21.5" 16:9
- Resolution: 1920 x 1080
- Brightness: 400 cd/m<sup>2</sup>
- Contrast Ratio: 1000:1
- Colors: 16.7 M
- Viewing Angle (H/V°): 89 / 89
- Backlight: LED
- Backlight MTBF (hrs): 50000
- Response Time: 5 ms

#### Touch Screen

- 10 points Resistive Multi-touch (Capacitive Multi-touch optional), USB/RJ45 interface

#### OSD Function

- OSD keys on rear side

#### Audio

- Line in 3.5 mm jack, Speakers

#### Rear I/O

- 1x DVI-D
- 1x VGA
- 1x HDMI
- 1x DP
- 1x USB
- Power input terminal block
- Power input DC Jack

#### Power Supply

- Power input: +12~+36V DC

#### Mechanical

- Aluminium Alloy
- IP front protection: IP65
- Mounting: Wall mount VESA 75x 75 / 100x100 mm

#### Dimensions

- Dimension (W x H x D mm): 528.2 x 319.6 x 68.3 mm
- Cut out: 516.2 x 307.6 mm
- Weight: 6.5 kg Net / 9 kg Gross

#### System & Environment

- Operating temperature: -20°C to 70°C
- Operating humidity: 10% to 80%
- Storage temperature: -20°C to 70°C
- Storage humidity: 10% to 90%

#### Certifications

- CE


#### Ordering Information

- AVD21WR (P/N: 57653200)
- AVD21WP (P/N: 57653100)

#### Package Contents:

- 1x VGA Cable D-SUB 15-pin
- 1x USB Touch Cable
- 1 x Power Cord
- 1 x Power Adapter
- 12 x Mounting Clips

## Dimensions

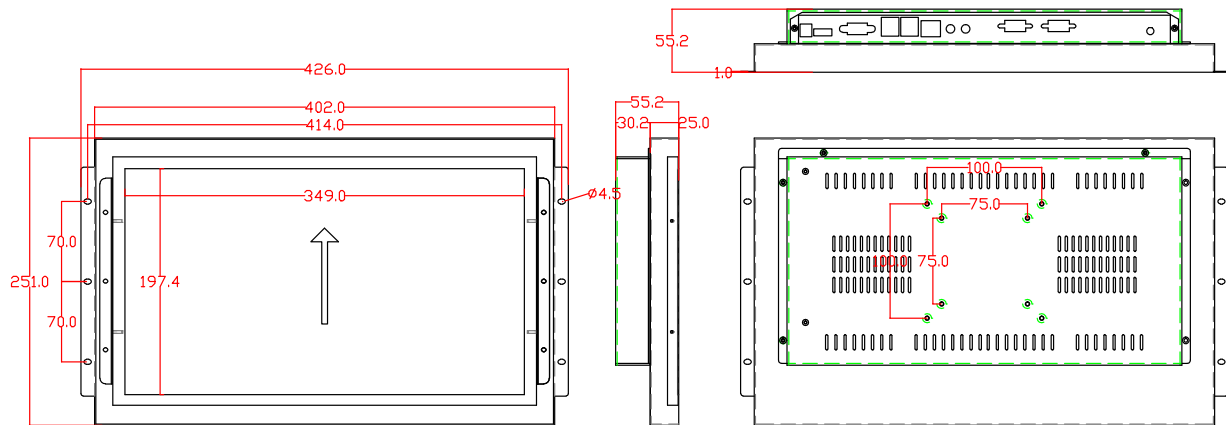

## Ordering Information

- AVD21WR  
Industrial 21.5" LCD monitor, 1920x1080 Full HD, 400 cd/m<sup>2</sup>, resistive touch screen, IP65 front, VGA, DVI, HDMI, Display Port, USB, Audio ports, speakers, DC terminal block 12-36V DC-in, DC Jack, power adapter, 12x panel mount holes
- AVD21WP  
Industrial 21.5" LCD monitor, 1920x1080 Full HD, 400 cd/m<sup>2</sup>, P-Cap touch screen, IP65 front, VGA, DVI, HDMI, Display Port, USB, Audio ports, speakers, DC terminal block 12-36V DC-in, DC Jack, power adapter, 12x panel mount holes